

D5

PRODUCT CATELOGUE DESIGN



GLASS TACT
SWITCH

www.drix.co.in

Drix[®]
Home Intelligence



D5 GLASS TACT SWITCH

www.drix.co.in



Powered by



Intelligence
Inside



ZigBee



Click Switch



Mute Switch

D5 MULTIPLE COLOR OPTIONS



Glass Black ☐

Glass White ☐

Glass Grey ☐

Glass Champagne ☐



D5 MULTIPLE BUTTON TYPES
1/2/3/4/6 BUTTON

D5 INSTALLATION OF CONJOINED FRAMES





Powered by



Intelligence
Inside



ZigBee®



Tact Switch



Conjoined
Structure




Backlight
Function



Framework
Supporting




Graph, Text
Customization

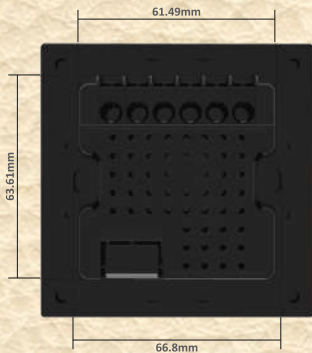

D5 BACK COVER

D8 THERMOSTAT BACK COVER

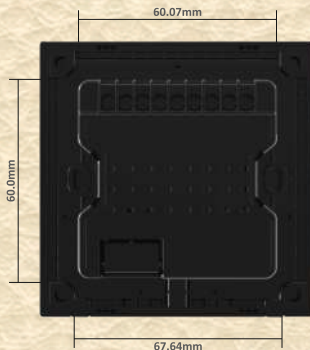

D5 SERIES – TACT SWITCH



Button



1 Gang Switch



2 Gang Switch



3 Gang Switch



4 Key 2 Gang Switch



6 Key 3 gang Switch


Exterior Color



White



Black



Grey



Champagne



Powered by



General Information

Wiring Method:	Zigbee
Line:	D Line
Series:	D5
Input Volatge:	Input Volatge:
Resistive Load:	≤1000W Single Circuit/Total Circuits ≤ 1000W
Capacitive/Inductive Load:	≤300W Single Circuit ≤ 300W
Neutral Line/Live Line:	●

Installation Method:	86mm Wall Box
Relay:	12A
Changeable Backlight Function:	●
Touch Lifespan:	100,000 times
Product Features:	Multiple Color Options Backlight Function High Sensitivity Button Text Customization

Materials

Surface Materials:	Glass
Surface Treatment:	Spary

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined

D5 SERIES – FULL SCREEN TOUCH THERMOSTAT



Exterior Color

Plastic
Material



Black

General Information

Air Conditioner Type:	Fan Coil	Standby Power:	1.2W
Wiring Method	Zigbee	Set Temperature Range:	16~30°C Temperature Control Accuracy : 1°C
Series:	D5	Temperature Correction Range:	-6°C~6°C , Resolution 1°C
Types of Switches:	Touch Thermostat	Temperature Sensor:	NTC Sensor
High Voltage:	☒	Adjustment Methods:	Touch Thermostat
Fan Speed:	3 Gears	Function Expansion:	Two-in-One: Floor Heating + Air Conditioning/ Fresh Air; Three-in-One: Floor Heating + Air Conditioning + Fresh Air
Rated Input Voltage	24V	Installation Method:	86mm Wall Box

Materials

Surface Materials:	Acrylic
Surface Treatment:	×

Dimensions

Product Dimensions:	W:86 H:86 D:9.9mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color



White



Grey



Black



Champagne

General Information


Wiring Method:	High Voltage	USB Output Current:	×
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D5	Relay:	×
Rated Current:	16A	Changeable Backlight Function:	×
Rated Voltage:	250V	Installation Method:	86mm Wall Box
USB Input Voltage:	×	Touch Lifespan:	100,000 times
USB Output Voltage:	×		

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage	USB Output Current:	×
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	Double Pole
Series:	D5	Relay:	×
Rated Current:	16A	Changeable Backlight Function:	×
Rated Voltage:	250V	Installation Method:	86mm Wall Box
USB Input Voltage:	×	Touch Lifespan:	100,000 times
USB Output Voltage:	×		

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D5 SERIES – 2 PIN & 3 PIN UNIVERSAL SOCKET



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage	USB Output Voltage:	×
Types of Switches:	High Voltage Socket	USB Output Current:	×
Series:	D5	Neutral Line / Live Line:	●
Input Voltage:	AC220V	Relay:	×
Rated Voltage:	250V	Changeable Backlight Function:	×
Rated Current:	10A	Installation Method:	86mm Wall Box
USB Input Voltage:	×	Touch Lifespan:	100,000 times

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D5 SERIES – 2 PIN & 3 PIN UNIVERSAL SOCKET WITH DUAL USB (C+A) (No BUTTON & NEON) (FAST CHARGE)

Drix[®]
Home Intelligence



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	D5
Rated Voltage:	250V
Rated Current:	10A
USB Input Voltage:	100-240V~
USB Output Voltage:	5±0.2VDC

USB Output Current:	2.1A
Neutral Line / Live Line:	●
Relay:	✕
Changeable Backlight Function:	✕
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D5 SERIES – 2 PIN & 3 PIN UNIVERSAL SOCKET WITH DUAL USB (NO BUTTON & NEON)



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	D5
Rated Voltage:	250V
Rated Current:	10A
USB Input Voltage:	100-240V~
USB Output Voltage:	5V 3A 9V 2.2A 12V 1.67A

Neutral Line / Live Line:	●
Relay:	✕
Changeable Backlight Function:	✕
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D5 SERIES – 2 PIN & 3 PIN UNIVERSAL SOCKET WITH DUAL USB (C+A) (No BUTTON & NEON) (NORMAL CHARGE)



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	D5
Rated Voltage:	250V
Rated Current:	10A
USB Input Voltage:	100-240V~
USB Output Voltage:	5±0.2VDC


USB Output Current:	2.1A
Neutral Line / Live Line:	●
Relay:	✕
Changeable Backlight Function:	✕
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage	USB Output Current:	×
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D5	Relay:	×
Rated Voltage:	250V	Changeable Backlight Function:	×
Rated Current:	13A	Installation Method:	86mm Wall Box
USB Input Voltage:	×	Touch Lifespan:	100,000 times
USB Output Voltage:	×		

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D5 SERIES – 3 PIN UNIVERSAL SOCKET WITH DUAL USB (NO BUTTON & NEON)



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage	USB Output Current:	2.1A
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D5	Relay:	✕
Rated Voltage:	250V	Changeable Backlight Function:	✕
Rated Current:	13A	Installation Method:	86mm Wall Box
USB Input Voltage:	100-240V~	Touch Lifespan:	100,000 times
USB Output Voltage:	5±0.2VDC		

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D5 SERIES – 3 PIN UNIVERSAL SOCKET WITH DUAL USB (C+A) (NO BUTTON & NEON) (NORMAL CHARGE)



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	D5
Rated Voltage:	250V
Rated Current:	13A
USB Input Voltage:	100-240V~
USB Output Voltage:	5±0.2VDC

USB Output Current:	2.1A
Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D5 SERIES – 3 PIN UNIVERSAL SOCKET WITH DUAL USB (C+A)(NO BUTTON & NEON) (FAST CHARGE)



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	D5
Rated Voltage:	250V
Rated Current:	13A
USB Input Voltage:	100-240V~
USB Output Voltage:	5V 3A 9V 2.2A 12V 1.67A

Neutral Line / Live Line:	●
Relay:	✕
Changeable Backlight Function:	✕
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:9mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D5 SERIES – 3 PIN UNIVERSAL SOCKET WITH SWITCH



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage	USB Output Current:	×
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D5	Relay:	×
Rated Voltage:	250V	Changeable Backlight Function:	×
Rated Current:	13A	Installation Method:	86mm Wall Box
USB Input Voltage:	×	Touch Lifespan:	100,000 times
USB Output Voltage:	×		

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	TV Cable	Operating Temperature:	- 2 0°C- + 4 0°C
Types of Switches:	Information Socket	Operating Humidity:	≥95%
Series:	D5	Installation Method:	86mm Wall Box
Signal Attenuation Degree:	≤1dB Single TV Socket ≤ 1dB, ≤8dB One-Branched TV Socket ≤ 8dB, ≤10dB Two-Branched TV Socket ≤ 10dB.		
Insertion and unplugging life:	5000 times		


Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D5 SERIES – DATA SOCKET (CAT 6)



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	CAT 6 Ethernet Cable
Types of Switches:	Information Socket
Series:	D5
Number of Cores:	8 Cores
Interface Type	Rj45
Connector:	QuickPort Embedded Module
Transmission Speed:	100-200MHZ


Operating Temperature:	- 2 0°C- + 4 0°C
Operating Humidity:	≥95%
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:14.5mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	CAT 5 Ethernet Cable
Types of Switches:	Information Socket
Series:	D5
Number of Cores:	8 Cores
Interface Type	Rj45
Connector:	QuickPort Embedded Module
Transmission Speed:	100-200MHZ


Operating Temperature:	- 2 0°C- + 4 0°C
Operating Humidity:	≥95%
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:14.5mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	Telephone Cable
Types of Switches:	Information Socket
Series:	D5
Insertion and unplugging life:	5000 times
Operating Temperature	-20°C+40°C

Operating Humidity:	≥95%
Installation Method	86mm Wall Box

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D5 SERIES – 300W SPEED CONTROLLER



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage	Rated Operating Voltage:	250-1000MHZ
Types of Switches:	Speed Switch	Input Frequency Variation Range:	47-50/60-63Hz
Series:	D5	Maximum Output Power Load:	<300W
Operating Temperature and Humidity:	-10°C~+45°C, ≤95%RH(Non-condensing)	Standby Power:	1W
Storage Temperature and Humidity:	-25°C~+70°C, ≤95%RH (Non-condensing)	Neutral Line / Live Line:	●
Maximum Supply Voltage:	90V-264VAC,50/60Hz	Installation Method	86mm Wall Box

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage	Rated Operating Voltage:	100-220-242V
Types of Switches:	Dimmer Switch	Input Frequency Variation Range:	47-50/60-63Hz
Series:	D5	Maximum Output Power Load:	LED:100W Incandescent Lamp:300W
Operating Temperature and Humidity:	-10°C~+45°C, ≤95%RH(Non-condensing)	Standby Power:	1W
Storage Temperature and Humidity:	-25°C~+70°C, ≤95%RH (Non-condensing)	Neutral Line / Live Line:	●
Maximum Supply Voltage:	90V-264VAC,50/60Hz	Installation Method	86mm Wall Box

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D5 SERIES – LED MECHANIC FOOTLIGHT (SENSOR VERSION)



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage	Operating Temperature & Humidity	-20°C~+40°C , ≤95%
Types of Switches:	Function Modular	Light Control Range	2Lux-10Lux
Series:	D5	Delay Time:	30±10 seconds
Input Voltage:	AC220V	Sensing Range:	2-4 meters (front) 1-2 meters (70 degrees on both left and right sides)
Rated Voltage:	220VAC±10%	Neutral Line / Live Line:	●
Power Frequency:	50/60Hz	Installation Method:	86mm Wall Box
Product Power:	0.65W		

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Installation Height:	0.3-1 Meter
Embedded Depth	≥45mm
Cojoined:	1/2/3/4/5 Conjoined



Exterior Color



White



Grey



Black



Champagne

General Information


Wiring Method:	High Voltage	Operating Temperature & Humidity	-20°C~+40°C , ≤95%
Types of Switches:	Function Modular	Light Control Range	×
Series:	D5	Delay Time:	×
Input Voltage:	AC220V	Sensing Range:	×
Rated Voltage:	220VAC±10%	Neutral Line / Live Line:	●
Power Frequency:	50/60Hz	Installation Method:	86mm Wall Box
Product Power:	0.65W		

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Installation Height:	0.3-1 Meter
Embedded Depth	≥45mm
Cojoined:	1/2/3/4/5 Conjoined



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	220V High Voltage	Storage Temperature and Humidity:	-25°C~+70°C , ≤95%
Types of Switches:	Function Modular	Maximum Resistive Load for a Single Circuit:	2Lux-10Lux
Series:	D5	Neutral Line / Live Line:	●
Input Voltage:	AC220V	Standby Power:	1W
Rated Voltage:	220VAC	Installation Method:	86mm Wall Box
Power-off Delay Time	15s		
Operating Temperature & Humidity	-10°C~+45°C,≤95%		

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth	≥45mm
Cojoined:	1/2/3/4/5 Conjoined

D5 SERIES – MECHANIC DOORBELL OUTDOOR DISPLAY



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	220V High Voltage	Neutral Line / Live Line:	●
Types of Switches:	Function Modular	Installation Method:	86mm Wall Box
Series:	D5	Product Features	Multiple Color Options Meets Users' Power Supply Needs
Input Voltage:	AC220V		

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth	≥45mm
Cojoined:	1/2/3/4/5 Conjoined



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	220V High Voltage	Rated Operating Voltage	100-220-242V
Types of Switches:	Dimmer Switch	Input Frequency:	50/60Hz
Series:	D5	Maximum Load:	100W
Input Voltage:	AC220V	Standby Power:	1W
Operating Temperature and Humidity:	-10°C~+45°C , ≤95%RH(Non-condensing)	Neutral Line / Live Line:	●
Storage Temperature and Humidity:	-25°C~+70°C , ≤95%RH (Non-condensing)	Installation Method:	86mm Wall Box
Maximum Supply Voltage:	90V-264VAC,50/60Hz		

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	220V High Voltage
Types of Switches:	High Voltage Socket
Series:	D5
Input Voltage:	AC220V
Rated Voltage:	250V
Rated Current:	13A
USB Input Voltage:	100-240V~
USB Output Voltage:	5±0.2VDC

USB Output Current:	2.1A
Neutral Line / Live Line:	●
Relay:	✕
Changeable Backlight Function:	✕
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

D5 SERIES – DUAL USB SOCKET (FAST CHARGE)



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage	USB Output Voltage / Current:	5V 3A 9V 2.2A 12V 1.67A
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	D5	Relay:	✕
Input Voltage:	AC220V	Changeable Backlight Function:	✕
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	13A	Touch Lifespan:	100,000 times
USB Input Voltage:	100-240V~		

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth	≥45mm
Cojoined:	1/2/3/4/5 Conjoined

D5 SERIES – DUAL USB C+A SOCKET (FAST CHARGE)



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	High Voltage
Types of Switches:	High Voltage Socket
Series:	D5
Input Voltage:	AC220V
Rated Voltage:	250V
Rated Current:	13A
USB Input Voltage:	100-240V~

USB Output Voltage / Current:	5V 3A 9V 2.2A 12V 1.67A
Neutral Line / Live Line:	●
Relay:	✕
Changeable Backlight Function:	✕
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times


Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth	≥45mm
Cojoined:	1/2/3/4/5 Conjoined

D5 SERIES – (DT) SHAVER SOCKET (BUILT-IN 10W TRANSFORMER)



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	220V High Voltage
Types of Switches:	High Voltage Socket
Series:	D5
Input Voltage:	AC220V
Rated Voltage:	110V-250V
Maximum Power:	2000W
USB Input Voltage:	×
USB Output Voltage:	×


USB Output Current	×
Neutral Line / Live Line:	●
Relay:	×
Changeable Backlight Function:	×
Installation Method:	86mm Wall Box
Touch Lifespan:	100,000 times

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	CAT 5 Ethernet Cable
Types of Switches:	Information Socket
Series:	D5
Number of Cores:	8 Cores
Connector:	QuickPort Embedded Module
Insertion and unplugging life:	100-200MHZ

USB Output Voltage:	5±0.2VDC
USB Output Current:	2.1A
Neutral Line / Live Line:	●
Installation Method:	86mm Wall Box

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	220V High Voltage	Operating Temperature	-20°C~+40°C
Types of Switches:	Function Modular	Operating Humidity:	≥95%
Series:	D5	Installation Method:	86mm Wall Box
Rated Current	≤3A		
Rated Voltage:	250V		

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth	≥45mm
Cojoined:	1/2/3/4/5 Cojoined



Exterior Color



White



Grey



Black



Champagne

General Information

Wiring Method:	220V High Voltage	Rated Current:	10A
Types of Switches:	Function Modular	Neutral Line / Live Line:	●
Series:	D5	Installation Method:	86mm Wall Box
Input Voltage:	AC220V		
Rated Voltage:	250V		

Materials

Surface Materials:	Glass
Surface Treatment:	Spray

Dimensions

Product Dimensions:	W:86 H:86 D:11.45mm (Excluding Base)
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Cojoined

SMART ~~SWEET~~ HOME

Drix[®]
Home Intelligence



Keep in **TOUCH** :



Corporate Office : No: 29, 11th Floor, Xavier Business Center,
Ibn Battuta Gate building, Dubai, UAE.



admin@drix.co.in



www.drix.co.in

Toll Free Number : 1800 123 7595

DISTRIBUTOR

HEAVEN AUTOMATION PRIVATE LIMITED

① #201, 2nd Floor, Gowrikrishna Residency,
7th Cross East, Thillainagar, Trichy - 620 018.

For Enquiry : 96777 97762 / 73737 30885

