


DK8

PRODUCT
CATELOGUE
DESIGN



www.drix.co.in

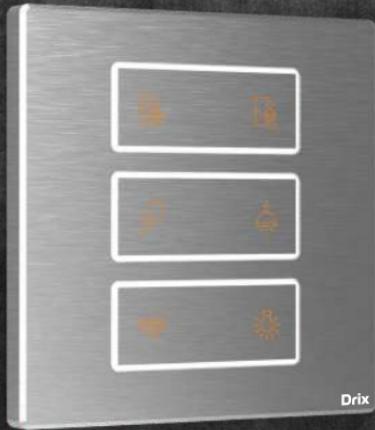

Aurora LED Circle
Metal Tact Switch
A Fashionable Masterpiece



Drix[®]
Home Intelligence




DK8 IMPORTED KNX CHIPS
BORN FOR KNX

DK8 METALLIC MATERIAL
WITH EXCEPTIONAL TEXTURE



DK8 CONFIGURED EXCLUSIVE THERMOSTAT ENJOY SMART LIVING WITH EASE

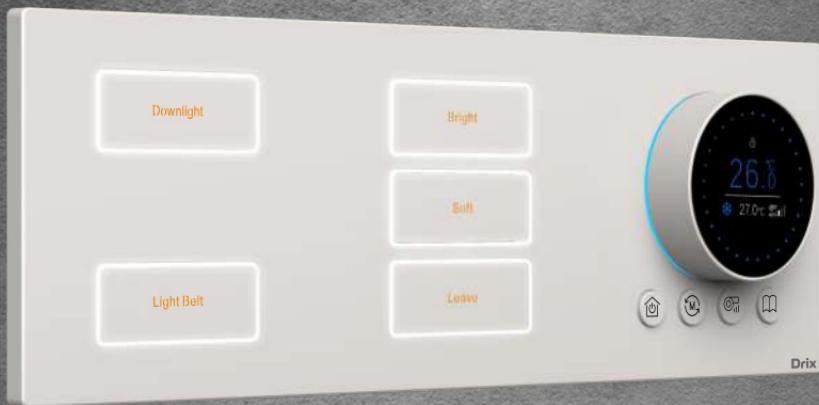

DK8 VIBRANT COLORS TAILORED TO YOUR DESIRES

www.drix.co.in



Spray White



Spray Grey



Frosted Silver



Spray Black



DK8 SPRAY WHITE METAL MATERIAL

DK8 FROSTED SILVER METAL MATERIAL



DK8 SPRAY GREY METAL MATERIAL



DK8 SPRAY BLACK METAL MATERIAL

DK8 SERIES



Multiple Color Options



Backlight Function



Conjoined Structure




Tact Switch



Multiple Material Options




Customized Button Graphics and Text

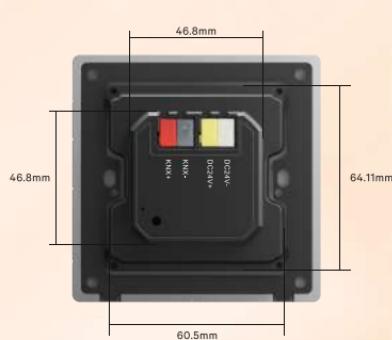

DK8 BACK COVER

DK8 THERMOSTAT BACK COVER

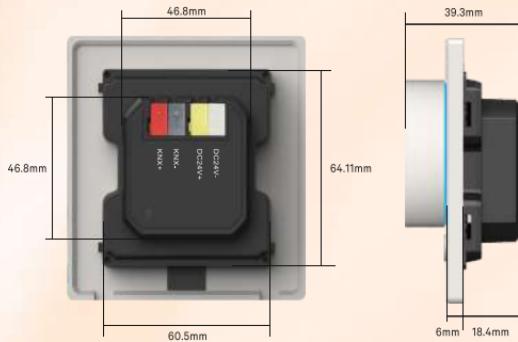

DK8 SERIES – KNX SWITCH

Button



Exterior Color



General Information

Wiring Method:	KNX	Installation Method:	86mm Wall Box
Types of Switches:	Metal Tact Switch	Changeable Backlight Function:	<input checked="" type="radio"/>
Series:	DK8	Touch Lifespan:	100,000 times
Input Voltage:	24V DC	Product Features:	Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization
Terminal Port:	KNX		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥15mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

DK8 SERIES – KNOB THERMOSTAT



Exterior Color



Aluminum Material



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Air Conditioner Type:	Fan Coil	Temperature Correction Range:	-6°C ~ 6°C · Resolution 1°C
Wiring Method:	KNX	Temperature Sensor:	NTC Sensor
Series:	Dk8 Knob Thermostat	Adjustment Methods:	Twist Knob
Low Voltage:	●	Function Expansion:	Two-in-One: Floor Heating + Air Conditioning/Fresh Air; Three-in-One: Floor Heating + Air Conditioning + Fresh Air
Fan Speed:	3 Gears	Installation Method:	86mm Wall Box
Rated Input Voltage:	24V	Product Features:	CNC Edge Multiple Color Options
Standby Power:	1.2W		
Set Temperature Range:	16 ~ 30°C	Temperature Control Accuracy :	1°C

Materials

Surface Materials:	Aluminum Frame + Acrylic Display	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

DK8 SERIES – SCHUKO SOCKET



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information


Wiring Method:	220V High Voltage	USB Output Current:	✗
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	DK8	Relay:	✗
Input Voltage:	AC220V	Changeable Backlight Function:	✗
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	16A	Touch Lifespan:	100,000 times
USB Input Voltage:	✗	Product Features:	Metal Surface Craftsmanship Multiple Color Options
USB Output Voltage:	✗		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	USB Output Current:	✗
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	DK8	Relay:	✗
Input Voltage:	AC220V	Changeable Backlight Function:	✗
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	13A	Touch Lifespan:	100,000 times
USB Input Voltage:	✗	Product Features:	Metal Surface Craftsmanship Multiple Color Options
USB Output Voltage:	✗		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	High Voltage	USB Output Current:	✗
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	DK8	Relay:	✗
Rated Current:	16A	Changeable Backlight Function:	✗
Rated Voltage:	250V	Installation Method:	86mm Wall Box
USB Input Voltage:	✗	Touch Lifespan:	100,000 times
USB Output Voltage:	✗	Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

DK8 SERIES – AUSTRALIAN SOCKET



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	High Voltage	USB Output Current:	✗
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	DK8	Relay:	✗
Rated Current:	16A	Changeable Backlight Function:	✗
Rated Voltage:	250V	Installation Method:	86mm Wall Box
USB Input Voltage:	✗	Touch Lifespan:	100,000 times
USB Output Voltage:	✗	Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials


Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

DK8 SERIES – AMERICAN SOCKET

Drix
HOME INTELLIGENCE



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	High Voltage	USB Output Current:	✗
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	DK8	Relay:	✗
Rated Current:	16A	Changeable Backlight Function:	✗
Rated Voltage:	250V	Installation Method:	86mm Wall Box
USB Input Voltage:	✗	Touch Lifespan:	100,000 times
USB Output Voltage:	✗	Product Features:	Metal Surface Craftsmanship Multiple Color Options


Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

DK8 SERIES – ITALIAN SOCKET



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	High Voltage	USB Output Current:	×
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	DK8	Relay:	×
Rated Current:	16A	Changeable Backlight Function:	×
Rated Voltage:	250V	Installation Method:	86mm Wall Box
USB Input Voltage:	×	Touch Lifespan:	100,000 times
USB Output Voltage:	×	Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	High Voltage	USB Output Current:	✗
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	DK8	Relay:	✗
Rated Current:	16A	Changeable Backlight Function:	✗
Rated Voltage:	250V	Installation Method:	86mm Wall Box
USB Input Voltage:	✗	Touch Lifespan:	100,000 times
USB Output Voltage:	✗	Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm
		Cojoined:	1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	High Voltage	USB Output Current:	×
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	DK8	Relay:	×
Rated Current:	16A	Changeable Backlight Function:	×
Rated Voltage:	250V	Installation Method:	86mm Wall Box
USB Input Voltage:	×	Touch Lifespan:	100,000 times
USB Output Voltage:	×	Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm
		Cojoined:	1/2/3/4/5 Conjoined



Exterior Color



Aluminum Material

Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	High Voltage	Neutral Line / Live Line:	<input checked="" type="radio"/>
Types of Switches:	High Voltage Socket	Relay:	<input type="radio"/>
Series:	DK8	Changeable Backlight Function:	<input type="radio"/>
Rated Current:	16A	Installation Method:	86mm Wall Box
Rated Voltage:	250V	Touch Lifespan:	100,000 times
USB Input Voltage:	100-240V~	Product Features:	CNC Edge Multiple Color Options Meets Users' Power Supply Needs
USB Output Voltage:	5V == 3A 9V == 2.2A 12V == 1.67A		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

DK8 SERIES – 2 PIN & 3 PIN UNIVERSAL SOCKET (MEDIUM-LARGE PANEL)

Drix®
Home Intelligence



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	High Voltage	USB Output Current:	✗
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	DK8	Relay:	✗
Input Voltage:	AC220V	Changeable Backlight Function:	✗
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	10A	Touch Lifespan:	100,000 times
USB Output Voltage:	✗	Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

DK8 SERIES – 2 PIN & 3 PIN UNIVERSAL SOCKET WITH DUAL USB (NO BUTTON & NEON)

Drix®
HOME INTELLIGENCE



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	USB Output Current:	2.1A
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	<input checked="" type="radio"/>
Series:	DK8	Relay:	<input type="radio"/>
Input Voltage:	AC220V	Changeable Backlight Function:	<input type="radio"/>
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	10A	Touch Lifespan:	100,000 times
USB Output Voltage:	80-260VAC	Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

DK8 SERIES – 2 PIN & 3 PIN UNIVERSAL SOCKET WITH DUAL USB (C+A)(NO BUTTON & NEON)(FAST CHARGE)



Exterior Color



Aluminum Material

Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	High Voltage	Neutral Line / Live Line:	<input checked="" type="radio"/>
Types of Switches:	High Voltage Socket	Relay:	<input type="radio"/>
Series:	DK8	Changeable Backlight Function:	<input type="radio"/>
Rated Current:	10A	Installation Method:	86mm Wall Box
Rated Voltage:	250V	Touch Lifespan:	100,000 times
USB Input Voltage:	100-240V~	Product Features:	Metal Surface Craftsmanship Multiple Color Options
USB Output Voltage:	5V == 3A 9V == 2.2A 12V == 1.67A		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

DK8 SERIES – 2 PIN & 3 PIN UNIVERSAL SOCKET WITH DUAL USB (C+A)(NO BUTTON & NEON)(NORMAL CHARGE)



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	High Voltage	USB Output Current:	2.1A
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	DK8	Relay:	✗
Rated Voltage:	250V	Changeable Backlight Function:	✗
Rated Current:	10A	Installation Method:	86mm Wall Box
USB Input Voltage:	100-240V~	Touch Lifespan:	100,000 times
USB Output Voltage:	5±0.2VDC	Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

DK8 SERIES - 3 PIN UNIVERSAL SOCKET



Exterior Color



Aluminum Material



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	USB Output Current:	<input checked="" type="checkbox"/>
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	<input checked="" type="checkbox"/>
Series:	DK8	Relay:	<input checked="" type="checkbox"/>
Input Voltage:	AC220V	Changeable Backlight Function:	<input checked="" type="checkbox"/>
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	13A	Touch Lifespan:	100,000 times
USB Input Voltage:	<input checked="" type="checkbox"/>	Product Features:	Metal Surface Craftsmanship Multiple Color Options
USB Output Voltage:	<input checked="" type="checkbox"/>		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	USB Output Current:	✗
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	●
Series:	DK8	Relay:	✗
Input Voltage:	AC220V	Changeable Backlight Function:	✗
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	13A	Touch Lifespan:	100,000 times
USB Input Voltage:	✗	Product Features:	Metal Surface Craftsmanship Multiple Color Options
USB Output Voltage:	✗		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

DK8 SERIES - 3 PIN UNIVERSAL SOCKET WITH DUAL USB (NO BUTTON & NEON)

Drix®
HOME INTELLIGENCE



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	USB Output Current:	2.1A
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	<input checked="" type="radio"/>
Series:	DK8	Relay:	<input type="radio"/>
Input Voltage:	AC220V	Changeable Backlight Function:	<input type="radio"/>
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	13A	Touch Lifespan:	100,000 times
USB Input Voltage:	80-260VAC	Product Features:	Metal Surface Craftsmanship Multiple Color Options
USB Output Voltage:	5±0.2VDC		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

DK8 SERIES – 3 PIN UNIVERSAL SOCKET WITH DUAL USB(C+A)(NO BUTTON & NEON) (FAST CHARGE)

Drix®
HOME INTELLIGENCE



Exterior Color



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	USB Output Current:	2.1A
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	<input checked="" type="radio"/>
Series:	DK8	Relay:	<input type="radio"/>
Input Voltage:	AC220V	Changeable Backlight Function:	<input type="radio"/>
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	13A	Touch Lifespan:	100,000 times
USB Input Voltage:	100-240V~	Product Features:	Metal Surface Craftsmanship Multiple Color Options
USB Output Voltage:	5V == 3A 9V == 2.2A 12V == 1.67A		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

DK8 SERIES – 3 PIN UNIVERSAL SOCKET WITH DUAL USB (C+A)(NO BUTTON & NEON)(NORMAL CHARGE)

Drix®
Home Intelligence



Exterior Color



Aluminum Material

Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	High Voltage	Neutral Line / Live Line:	<input checked="" type="radio"/>
Types of Switches:	High Voltage Socket	Relay:	<input type="radio"/>
Series:	DK8	Changeable Backlight Function:	<input type="radio"/>
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	13A	Touch Lifespan:	100,000 times
USB Input Voltage:	100-240V~	Product Features:	CNC EdgeMultiple Color Options Meets Users' Power Supply Needs
USB Output Voltage:	5±0.2VDC		
USB Output Current:	2.1A		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	TV Cable	Operating Temperature:	- 2 0 °C - + 4 0 °C
Types of Switches:	Information Socket	Operating Humidity:	≥95%
Series:	DK8	Installation Method:	86mm Wall Box
Signal Attenuation Degree:	≤1dB Single TV Socket ≤ 1dB, ≤8dB One-Branched TV Socket ≤ 8dB, ≤10dB Two-Branched TV Socket ≤ 10dB.	Touch Lifespan:	100,000 times
Insertion and unplugging life:	5000 times	Product Features:	CNC EdgeMultiple Color Options Meets Users' Power Supply Needs

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey




Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	CAT 5 Ethernet Cable	Operating Temperature:	- 2 0°C - + 4 0°C
Types of Switches:	Information Socket	Operating Humidity:	≥95%
Series:	DK8	Installation Method:	86mm Wall Box
Number of Cores:	8 Cores	Touch Lifespan:	100,000 times
Connector:	QuickPort Embedded Module	Product Features:	Metal Surface Craftsmanship Multiple Color Options
Transmission Speed:	100-200MHZ		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined:	1/2/3/4/5 Conjoined
-----------	---------------------



Exterior Color

Aluminum Material



Spray White



Spray Grey




Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	CAT 6 Ethernet Cable	Operating Temperature:	- 2 0°C - + 4 0°C
Types of Switches:	Information Socket	Operating Humidity:	≥95%
Series:	DK8	Installation Method:	86mm Wall Box
Number of Cores:	8 Cores	Touch Lifespan:	100,000 times
Connector:	QuickPort Embedded Module	Product Features:	Metal Surface Craftsmanship Multiple Color Options
Transmission Speed:	100-200MHZ		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined:	1/2/3/4/5 Conjoined
-----------	---------------------



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	Telephone Cable	Operating Humidity:	≥95%
Types of Switches:	Information Socket	Installation Method:	86mm Wall Box
Series:	DK8	Product Features:	Metal Surface Craftsmanship Multiple Color Options
Insertion and unplugging life:	5000 times		
Operating Temperature:	- 20°C - + 40°C		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	Input Frequency Variation Range:	47-50/60-63Hz
Types of Switches:	Dimmer Switch	Maximum Output Power Load:	LED:100W Incandescent Lamp:300W
Series:	DK8	Standby Power:	1W
Operating Temperature & Humidity:	-10°C~+45°C 95%RH(Non-condensing)		
Storage Temperature & Humidity:	-25°C~+70°C · 95%RH (Non-condensing)	Neutral Line / Live Line:	<input checked="" type="radio"/>
Maximum Supply Voltage:	90V-264VAC,50/60Hz	Installation Method:	86mm Wall Box
Rated Operating Voltage:	100-220-242V	Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	Input Frequency Variation Range:	47-50/60-63Hz
Types of Switches:	Speed Switch	Maximum Output Power Load:	<300W
Series:	DK8	Standby Power:	1W
Operating Temperature & Humidity:	-10°C~+45°C 95%RH(Non-condensing)		
Storage Temperature & Humidity:	-25°C~+70°C 95%RH (Non-condensing)		
Maximum Supply Voltage:	90V-264VAC,50/60Hz	Neutral Line / Live Line:	<input checked="" type="radio"/>
Rated Operating Voltage:	250-1000MHz	Installation Method:	86mm Wall Box
Product Features:		Metal Surface Craftsmanship Multiple Color Options	

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined:	1/2/3/4/5 Conjoined
-----------	---------------------




Exterior Color


Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	Operating Temperature & Humidity:	-20°C~+40°C, ≤95%
Types of Switches:	Function Modular	Light Control Range:	2Lux-10Lux
Series:	DK8	Delay Time:	30±10 seconds
Input Voltage:	AC220V	Sensing Range:	2-4 meters (front) 1-2 meters (70 degrees on both left and right sides)
Rated Voltage:	220VAC±10%	Neutral Line / Live Line:	●
Power Frequency:	50/60Hz	Installation Method:	86mm Wall Box
Product Power:	0.65W	Product Features:	Multiple Color Options

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Installation Height:	0.3-1 Meter

Dimensions

Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	Operating Temperature & Humidity:	-20°C~+40°C, ≤95%
Types of Switches:	Function Modular	Light Control Range:	✗
Series:	DK8	Delay Time:	✗
Input Voltage:	AC220V	Sensing Range:	✗
Rated Voltage:	220VAC±10%	Neutral Line / Live Line:	●
Power Frequency:	50/60Hz	Installation Method:	86mm Wall Box
Product Power:	0.65W	Product Features:	Multiple Color Options

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Installation Height:	0.3-1 Meter
Embedded Depth:	≥45mm
Cojoined:	1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	Operating Temperature & Humidity:	-10°C~+45°C, ≤95%
Types of Switches:	Function Modular	Storage Temperature & Humidity:	-25°C~+70°C, ≤95%
Series:	DK8	Maximum Resistive Load for a Single Circuit	2Lux-10Lux
Input Voltage:	AC220V	Neutral Line / Live Line:	●
Rated Voltage:	220VAC	Standby Power:	1W
Power-off Delay Time:	15s	Installation Method:	86mm Wall Box
Product Power:	0.65W		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined:	1/2/3/4/5 Conjoined
-----------	---------------------



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	Rated Operating Voltage:	100-220-242V
Types of Switches:	Dimmer Switch	Input Frequency:	50/60Hz
Series:	DK8	Maximum Load:	100W
Input Voltage:	AC220V	Standby Power:	1W
Operating Temperature & Humidity:	-10°C~+45°C · ≤95%RH(Non-condensing)	Neutral Line / Live Line:	●
Storage Temperature & Humidity:	-25°C~+70°C · ≤95%RH (Non-condensing)	Installation Method:	86mm Wall Box
Maximum Supply Voltage:	90V-264VAC,50/60Hz	Product Features:	Metal Surface Craftsmanship Multiple Color Options

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined:	1/2/3/4/5 Conjoined
-----------	---------------------



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	USB Output Current:	2.1A
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	<input checked="" type="radio"/>
Series:	DK8	Relay:	<input type="radio"/>
Input Voltage:	AC220V	Changeable Backlight Function:	<input type="radio"/>
Rated Voltage:	250V	Installation Method:	86mm Wall Box
Rated Current:	13A	Touch Lifespan	100,000 times
USB Input Voltage:	80-260VAC	Product Features:	Metal Surface Craftsmanship Multiple Color Options
USB Output Voltage:	5±0.2VDC		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined:	1/2/3/4/5 Conjoined
-----------	---------------------



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	High Voltage	Neutral Line / Live Line:	<input checked="" type="radio"/>
Types of Switches:	High Voltage Socket	Relay:	<input type="radio"/>
Series:	DK8	Changeable Backlight Function:	<input type="radio"/>
Input Voltage:	AC220V	Installation Method:	86mm Wall Box
Rated Voltage:	250V	Touch Lifespan:	100,000 times
Rated Current:	13A	Product Features:	Metal Surface Craftsmanship Multiple Color Options
USB Input Voltage:	100-240V~		
USB Output Voltage:	5V == 3A 9V == 2.2A 12V == 1.67A		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

DK8 SERIES - (DT) SHAVER SOCKET (BUILT-IN 10W TRANSFORMER) (MEDIUM-LARGE PANEL)

Drix
HOME INTELLIGENCE



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information


Wiring Method:	220V High Voltage	USB Output Current:	<input checked="" type="checkbox"/>
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	<input checked="" type="checkbox"/>
Series:	DK8	Relay:	<input checked="" type="checkbox"/>
Input Voltage:	AC220V	Changeable Backlight Function:	<input checked="" type="checkbox"/>
Rated Voltage:	110V-250V	Installation Method:	86mm Wall Box
Maximum Power:	2000W	Touch Lifespan	100,000 times
USB Input Voltage:	<input checked="" type="checkbox"/>	Product Features:	Metal Surface Craftsmanship Multiple Color Options
USB Output Voltage:	<input checked="" type="checkbox"/>		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	USB Output Current:	<input checked="" type="checkbox"/>
Types of Switches:	High Voltage Socket	Neutral Line / Live Line:	<input checked="" type="checkbox"/>
Series:	DK8	Relay:	<input checked="" type="checkbox"/>
Input Voltage:	AC220V	Changeable Backlight Function:	<input checked="" type="checkbox"/>
Rated Voltage:	110V-250V	Installation Method:	86mm Wall Box
Maximum Power:	2000W	Touch Lifespan	100,000 times
USB Input Voltage:	<input checked="" type="checkbox"/>	Product Features:	Metal Surface Craftsmanship Multiple Color Options
USB Output Voltage:	<input checked="" type="checkbox"/>		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

**Exterior Color**

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	Operating Humidity:	≥95%
Types of Switches:	Function Modular	Installation Method:	86mm Wall Box
Series:	DK8	Product Features:	Metal Surface Craftsmanship Multiple Color Options
Operating Temperature:	- 2 0°C - + 4 0°C		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	Neutral Line / Live Line:	<input checked="" type="radio"/>
Types of Switches:	Function Modular	Installation Method:	86mm Wall Box
Series:	DK8	Product Features:	Multiple Color Options Meets Users' Power Supply Needs
Input Voltage:	AC220V		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined



Exterior Color

Aluminum Material



Spray White



Spray Grey



Spray Black



Frosted Silver



Brushed Black



Brushed Grey

General Information

Wiring Method:	220V High Voltage	Rated Current:	10A
Types of Switches:	Function Modular	Neutral Line / Live Line:	<input checked="" type="radio"/>
Series:	DK8	Installation Method:	86mm Wall Box
Input Voltage:	AC220V	Product Features:	Multiple Color Options Meets Users' Power Supply Needs
Rated Voltage:	250V		

Materials

Surface Materials:	Aluminum	Product Dimensions:	W:86 H:86 D:6mm (Excluding Base)
Surface Treatment:	Spray/Brushed	Embedded Depth:	≥45mm

Dimensions

Cojoined: 1/2/3/4/5 Conjoined

SMART ~~SWEET~~ HOME

Drix[®]
Home Intelligence



Keep in **Touch**:

📍 Corporate Office : No: 29, 11th Floor, Xavier Business Center,
Ibn Battuta Gate Building, Dubai UAE

✉ admin@drix.co.in

🌐 www.drix.co.in

Toll Free Number : 1800 123 7595

IMPORTER AND MANUFACTURER

HEAVEN AUTOMATION PRIVATE LIMITED

📍 #201, 2nd Floor, Gowrikrishna Residency,
7th Cross East, Tilloanagar, Trichy - 620 018.
For Enquiry : 96777 97762 / 73737 30885